




# HB<sup>®</sup> Wall Ties and Anchors

04082/HOH  
BuyLine 1823

## #344 - Rigid Partition Anchor

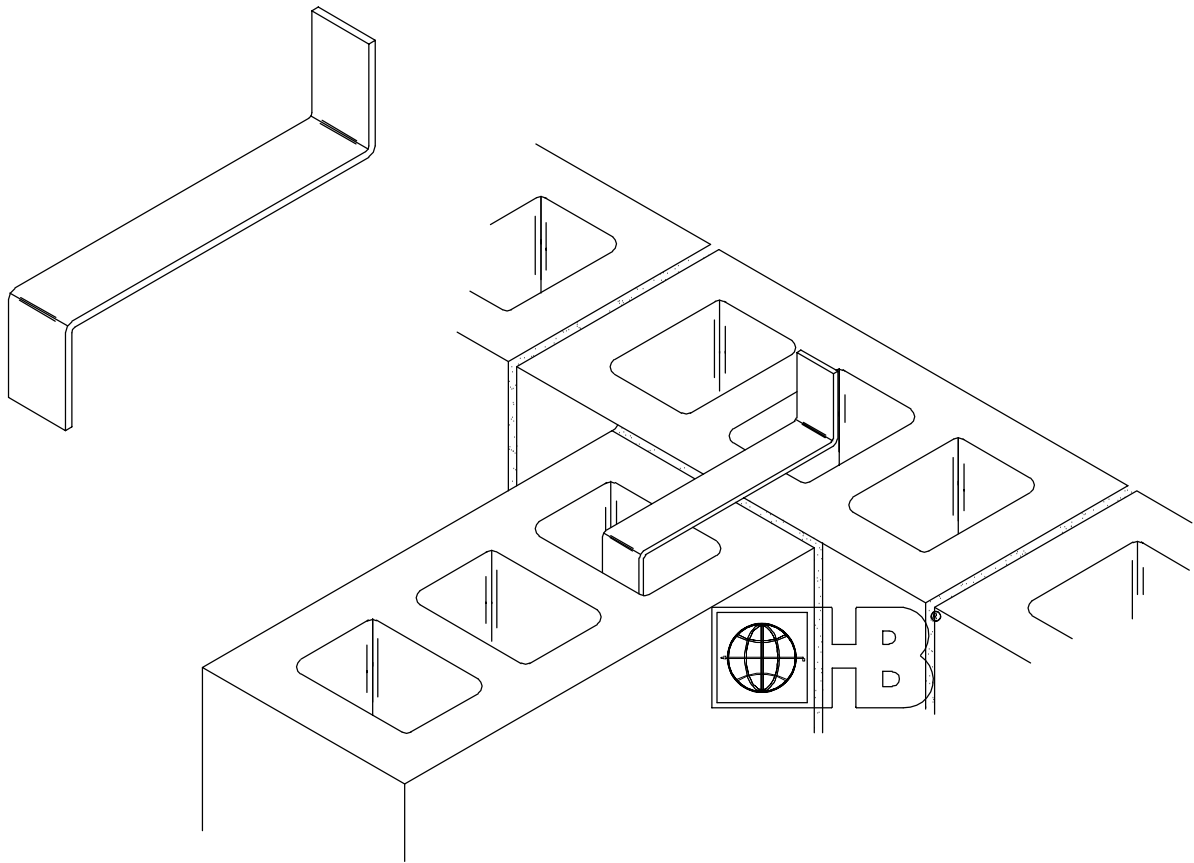

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**STEEL** (Carbon Steel):

ASTM A 366; ASTM A 36 (3/16" thick or greater)

Zinc Coating:

ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication)

Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup>

**STEEL** (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors); ASTM A 240 (3/16" thick or greater)

**THICKNESS:**

- 1/8"
- 3/16"
- 1/4"
- OTHER \_\_\_\_\_

**WIDTH:**

- 1"
- 1 1/4"
- 1 1/2"
- 2"

**FINISH:**

- Hot Dip Galvanized
- Stainless Steel

**NOTE:** Standard Length is 24" with 2" bends. Other sizes available on request.

We Anchor The World



Hohmann & Barnard, Inc.  
30 Rasons Court  
Hauppauge, New York 11788  
TEL: (800) 645-0616 FAX: (631) 234-0683

WEBSITE: [www.h-b.com](http://www.h-b.com)  
E-MAIL: [weanchor@h-b.com](mailto:weanchor@h-b.com)

©HOHMANN & BARNARD, INC. - 1999